

**DATASHEET**

---

# **PXE SERIES POWER PRODUCTS**

**Precision High Voltage Meter**

## **PXe-4700**

# PXe-4700 Precision High Voltage Meter



## **HV Reference Divider Performance** **Easy-to-Use Touchscreen Operation** **Crush-Proof Steel Enclosure**

The PXe-4700 Precision High Voltage Meter offers the highest level of measurement accuracy, yet with its color touchscreen is surprisingly easy to use. Vitrek's DSP technology delivers outstanding AC and DC voltage measurement accuracy, stability, repeatability and resolution. High speed, direct readings are provided up to 10KV DC or rms AC and with available HV SmartProbes™, the measurement range can be extended to 35KV, 70KV, 100KV and 150KV.

# PX Electronics PXe-4700 HV Meter – Precision and rugged reliability you can depend on

## Direct Measurement or HV SmartProbe™

PX Electronics' PXe-4700 precisely measures voltages directly up to 10KV, right out of the box—with no external probes. That's high enough for most of the HV sources out there. However, should you care to expand your high voltage measurement range—just add one or more of the available 35KV, 70KV, 100KV and 150KV SmartProbes™. The PX Electronics SmartProbes™ each store their own calibration data which is down loaded when they are plugged in to the PXe-4700, this results in high accuracy, calibrated readings and allows any PX Electronics SmartProbe™ to be used with any PXe-4700 HV Meter. The SmartProbe's™ proprietary, ultra-low TC attenuator design minimizes selfheating while its low capacitance technology enhances AC performance. In addition to the direct input terminal the PXe-4700 has two probe inputs—use one



*HVL Series High Performance Lab Grade, HV-SmartProbes™ shown above in 35KV, 70KV and 100KV models. Handheld HVP-35 portable HV-SmartProbes™ shown with detachable probe tip.*

probe to extend your measurement range or use two probes for making high voltage differential measurements.

## Superior Performance by Design

Measurement integrity is our bottom line whether you are running a production line manufacturing medical imaging equipment, in a national laboratory conducting ground breaking research or in the cal lab certifying test equipment it is essential to choose your tools carefully. To insure the best possible measurement accuracy, the PXe-700 makes over 40,000 readings per second which are then filtered, subsampled, scaled and offset corrected—all with "error free" mathematic methodology. The True RMS AC readings are as true as they come, while the DC measurements offer rocket fast settling with rock solid stability. In addition to this, the PXe-4700 provides VLF AC readings down to 0.01 Hz, as well as, peak to peak, crest factor and fundamental frequency measurement. Available G series probes offer extremely high input impedances for electrostatic voltmeter applications.

## High Voltage Test Automation

Automate your HV test equipment with the PXe-4700's built-in Ethernet port, high speed serial communication port or available GPIB. The PXe-4700 is fully programmable—so you can select your measurement mode and bandwidth, then take readings as often as desired. The PXe-4700 also comes standard with a USB printer port, to capture readings and get hardcopy printouts of HV plots—so you can document the sag or overshoot in a typical hipot test.



*Chart Mode automatically plots voltage readings from a few seconds to several days. Highly useful for determining ramp linearity, overshoot and sag on hipot testers and other HV sources.*

## PX Electronics' Calibration laboratory is ISO 17025 Accredited

The PXe-4700 and probes come with a free ISO 17025 accredited calibration with data and uncertainties.



## Features

- Calibrates Hipot testers, HV power supplies and insulation testers
- Measures up to 10KV directl and 35, 70, 100 or 150KV with HV Smartprobes
- Basic accuracy—0.03% DC and 0.1% true RMS AC
- Color touch screen—makes for easy measurement selection and display
- Ethernet, serial, USB printer port all standard, GPIB optional
- Simultaneous AC and DC voltage readings
- Chart Mode provides graphic documentation of HV drift, ramp time, overshoot and sag

*continued*

## Features *continued*

- Calibrates Hipot testers, HV power supplies and insulation testers
- Dual inputs allows Differential or Phase-to-Phase voltage measurement
- High speed DSP provides up to 60 filtered readings per second
- True RMS AC measurement from 0.01Hz to 600Hz—covering VLF to aviation frequencies
- AC noise rejection 78dB—for rock solid, six digit DC Measurements
- Optional battery pack goes up to 11 hours between charges
- G Series—high input impedance probes for electrostatic applications
- CE mark Certified to EN61010
- Available ISO 17025 accredited calibration
- Three year extended warranty (one year standard warranty)

## PXe-4700 Performance Specifications

### Maximum Voltage Measurement (Input Impedance)

Direct Input Terminal .....	10KVDC, 10KVACrms (110 Meg ohms)
HVL/P-35 Probe .....	35KVDC, 30KVACrms (200 Meg ohms)
HVL-35G Probe .....	35KVDC (10 Gig ohms)
HVL-70 Probe.....	70KVDC, 50KVACrms (400 Meg ohms)
HVL-70G Probe .....	70KVDC (20 Gig ohms)
HVL-100 Probe.....	100KVDC, 75KVACrms (600 Meg ohms)
HVL-100G Probe .....	100KVDC (30 Gig ohms)
HVL-150 Probe.....	140KVDC, 100KVACrms (1 Gig ohm)

### DC Voltage Measurement Accuracy (Resolution)

Direct Input Terminal .....	0.03% of reading + 0.03V (10mV)
HVL/P-35 Probe .....	0.035% of reading + 0.07V (100mV)
HVL-35G Probe .....	0.25% of reading + 1.5V (1V)
HVL-70 Probe.....	0.04% of reading + 0.2V (1V)
HVL-70G Probe .....	0.35% of reading + 3.5V (1V)
HVL-100 Probe.....	0.05% of reading + 0.3V (1V)
HVL-100G Probe .....	0.5% of reading + 15 (10V)
HVL-150 Probe.....	0.08% of reading + 0.7V (10V)


### AC Voltage Measurement Accuracy (Resolution)

Direct Input Terminal .....	0.12% of reading + 0.1V (10mV)
HVL/P-35 Probe .....	0.1% of reading + 0.2V (100mV)
HVL-70 Probe.....	0.1% of reading + 0.4V (1V)
HVL-100 Probe.....	0.1% of reading + 0.6V (1V)
HVL-150 Probe.....	0.5% of reading + 1V (10V)

### High Voltage Self Heating Effect

Direct Input Terminal .....	1.5 ppm of reading per KV2
HVL/P-35 Probe .....	0.4 ppm of reading per KV2
HVL-70 Probe.....	0.14 ppm of reading per KV
HVL-100 Probe.....	0.14 ppm of reading per KV2
HVL-150 Probe.....	0.2 ppm of reading per KV2

*continued*

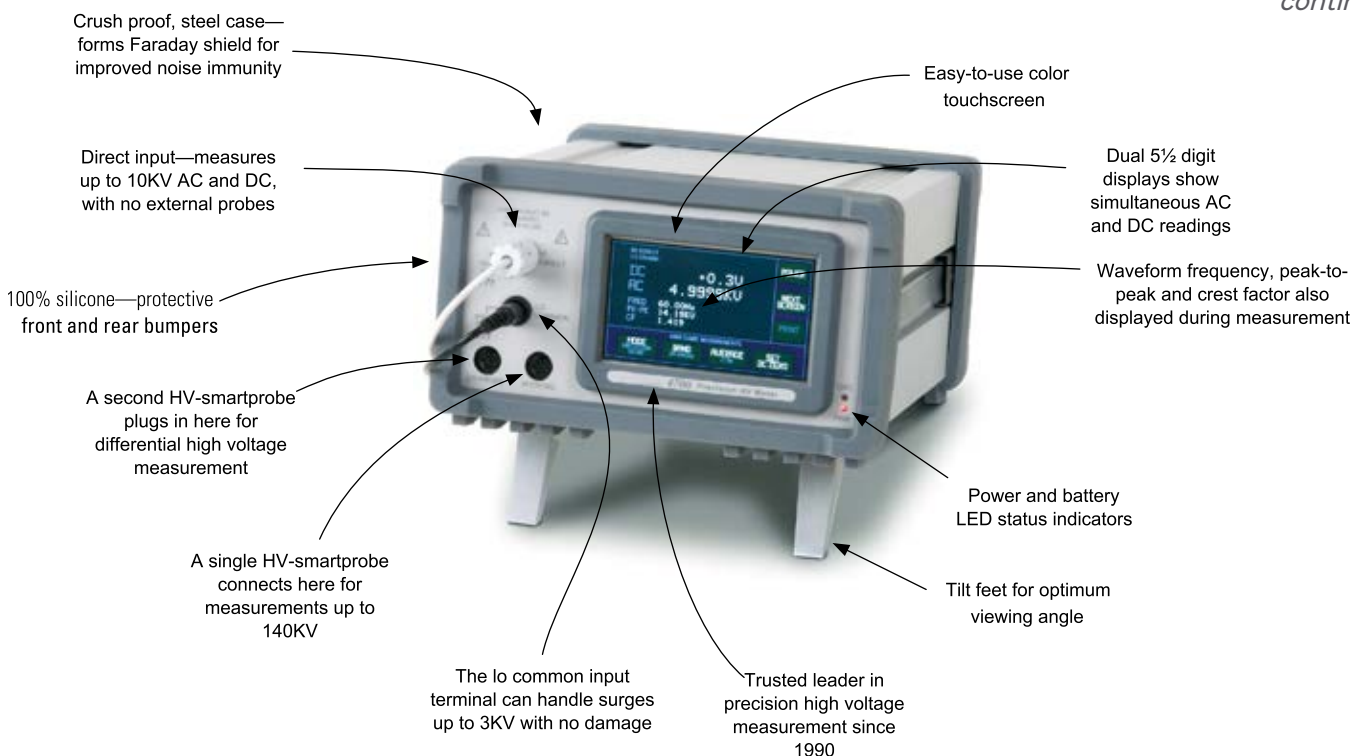

## General Specifications

AC/DC Voltage Measurement  
Resolution: Selectable 4, 5 or 6 digits Measurement Functions: DC Voltage, True RMS AC Voltage, Ripple, Peak to Peak, Crest Factor & Frequency Measurement (4 digits 0.01 Hz to 600Hz) Measurement Time: Selectable down to 16mS (60 readings per sec.) Maximum Input to Common Terminal: 3KV Peak for 1 sec, no damage Accuracy Specifications: Valid one year  $\pm 5^\circ\text{C}$  from Cal temperature

## Environmental/Physical

Operating Environment 0 to 50C, <85% RH (non-condensing)  
Dimensions 218mm (8.5") wide x 130mm (5") high x 253mm (10") deep, nominally Weight 2.4kg max (4kg shipping)

## Power

AC Source 45 to 450Hz, 100 to 265Vrms at <15W (20VA) using supplied external power supply  
DC Source 11 to 16Vdc at <1.2A, using a center positive 2.5mm DC power connector BP-47 Battery  
Option Up to 11hrs continuous operation  
Standard Accessories  
The PXE4700 and probes are shipped with an ISO 17025 cal cert with data and uncertainties, direct input test leads, chassis ground lead, operator's manual, and external power supply. The HVP handheld probes comes with a detachable probe tip and the HVL series probes ship come with a toroid corona shield.

## Warranty

Three year extended parts and labor warranty with no charge registration and annual factory calibration. One year standard warranty.

## Ordering Information

4700	Precision High Voltage Meter
BP-47	Internal 11 Hour Battery Pack
GP-47	GPIB (IEEE-488) Interface
HC-47	Hard Carrying Case
RM-47	Rack Mount Kit
HVP-35	Handheld Probe
HVL-35	35KV Bench Top Lab Probe
HVL-70	70KV Bench Top Lab Probe
HVL-100	100KV Bench Top Lab Probe
HVL-150	150KV Bench Top Lab Probe
HVL-35G	35KV High Impedance Lab Probe
HVL-70G	70KV High Impedance Lab Probe
HVL-100G	100KV High Impedance Lab Probe
TL-47	Replacement Test Lead kit

Document Rev-V1.1  
Copyright © 2025 PE Electronics

---

PX Electronics  
13b Southview Park,  
Marsack Street,  
Reading  
Berkshire  
RG4 5AF  
United Kingdom



Tel: +44 118 206 7525  
Email: [info@pxelectronic.com](mailto:info@pxelectronic.com)  
Website: [www.pxelectronic.com](http://www.pxelectronic.com)